

## 塑封高效率整流二极管


反向电压 200 ~ 600 V

正向电流 2.0 A

## Plastic High-Efficiency Recover Rectifier

Reverse Voltage 200 ~ 600V

Forward Current 2.0 A

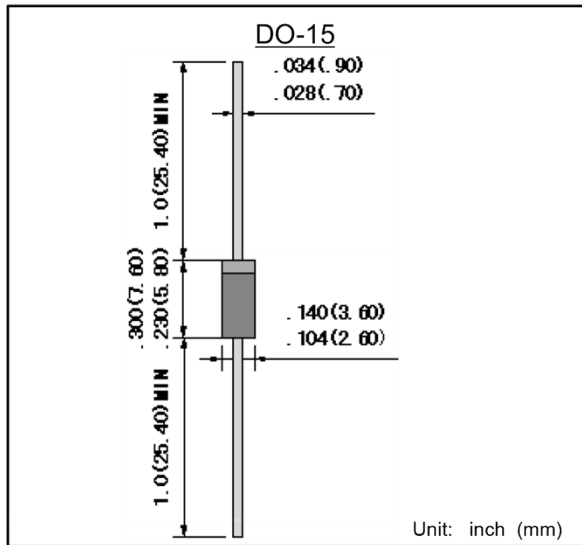

## 特征 Features

- 反向漏电流低 Low reverse leakage
- 正向浪涌承受能力强 High forward surge capability
- 高信赖性 High reliability
- 高温焊接保证 High temperature soldering guaranteed:  
260°C/10 秒, 引线长度:0.375" (9.5mm)  
260°C/10seconds, 9.5mm lead length
- 引线 and 管体皆符合RoHS标准  
Lead and body according with RoHS standard
- 型号后缀“-F”标记无卤素产品  
Green compound with suffix "-F" on Marking

## 机械数据 Mechanical Data

- 封装外形:DO-15 塑封 Case:DO-15 Molded plastic
- 环氧树脂: UL易燃等级: 94V-0  
Epoxy: UL 94V-0 rate flame retardant
- 引脚: 镀锡, 无铅 Lead: Pure tin plated, lead free

## 最大值和特性 TA = 25°C 除非另有规定。

### Maximum Ratings & Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

参数 Parameter	符号 Symbols	MUR220G	MUR230G	MUR240G	MUR260G	单位 Unit
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	$V_{RRM}$	200	300	400	600	V
最大均方根电压 Maximum RMS voltage	$V_{RMS}$	140	210	280	420	V
最大直流阻断电压 Maximum DC blocking voltage	$V_{DC}$	200	300	400	600	V
最大正向平均整流电流 Maximum average forward rectified current	$I_{F(AV)}$	2.0				A
正向不重复浪涌电流 8.3 ms单一正弦半波 Non-repetitive peak forward surge current 8.3 ms single half sine-wave	$I_{FSM}$	50				A
典型热阻 Typical thermal resistance (Note 1)	$R_{\theta JA}$	60				°C/W
工作结温 Operating junction temperature range	$T_j$	-55 --- +150				°C
存储温度 Storage temperature range	$T_{STG}$	-55 --- +150				°C

备注 Note:

- 1) 引线长度 0.375" (9.5 mm), 安装在PCB板上, 从PN结到周围环境的热阻。
- 1) Thermal resistance from junction to ambient at 0.375" (9.5 mm) lead length, PCB mounted.

## 电特性 TA = 25°C 除非另有规定。


### Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

参数 Parameter	符号 Symbols	MUR220G	MUR230G	MUR240G	MUR260G	单位 Unit
最大正向电压 @IF=2.0A Maximum forward voltage	$V_F$	0.95	1.30		1.35	V
最大反向电流 @V <sub>DC</sub> TA= 25°C Maximum reverse current	$I_R$	5				μA
最大反向恢复时间 IF=0.5A, IR=1.0A, IRR=0.25A MAX. reverse recovery time	$T_{rr}$	25	50			ns

## 特性曲线 Characteristic Curves


正向特性曲线 (典型值)

TYPICAL FORWARD CHARACTERISTIC

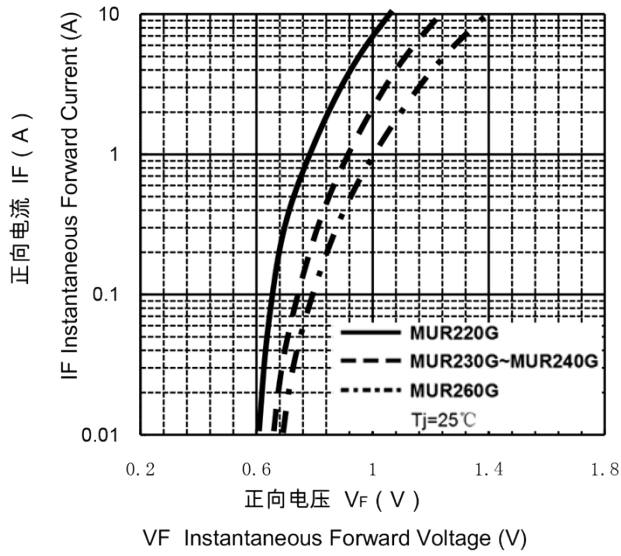


正向电流降额曲线

FORWARD CURRENT DERATING CURVE

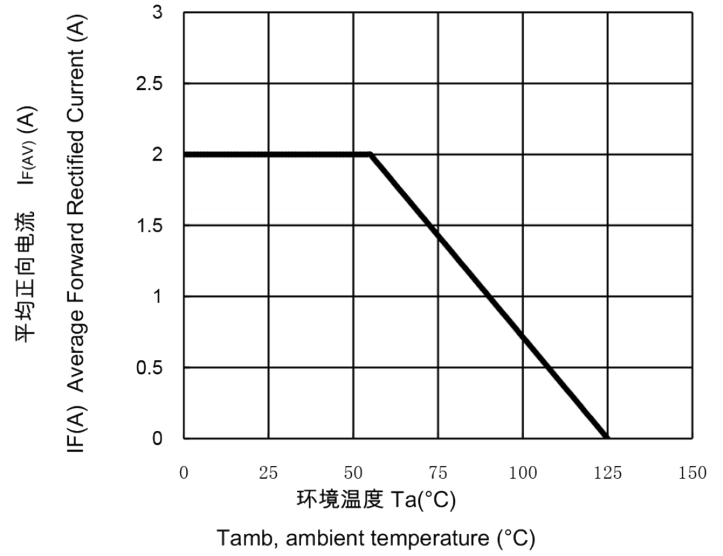

浪涌特性曲线 (最大值)

MAXIMUM NON REPETITIVE  
PEAK FORWARD SURGE CURRENT

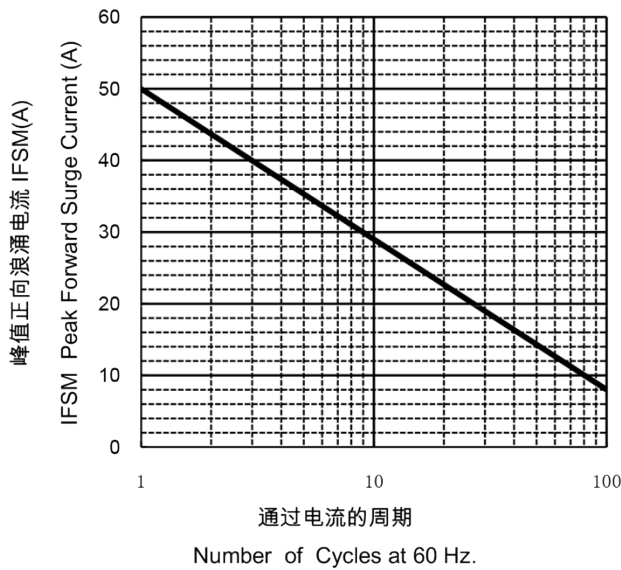

反向特性曲线

Typical Reverse Characteristics

